



acniti LLC
1-2-9 Nyoidani
Minoh Osaka
562-0011
Japan



Turbiti wall mount

The wall mounted Turbiti is the multipurpose nanobubble generator suitable for agriculture, horticulture and fish cultivation sites. Super saturation of oxygen for water day storage tanks in horticulture. Drinking water solutions for chicken, cows, pigs and horses, giving high DO water with ultrafine bubbles to animals with enhance their food digestion more efficiently and results in healthier animals.

Turbiti wall mount


Turbiti wall mounted nanobubble mixer with enhanced aeration technology

- ✓ Clean Tech – Chemical free cleaning solutions
- ✓ easy to implement in existing installations
- ✓ efficient gas dissolution and ultrafine bubble production
- ✓ uses turbiti nanobubble production technology
- ✓ systems in use for poultry and livestock drinking water
- ✓ nanobubble production for irrigation ponds for agriculture
- ✓ combined in wastewater treatment systems
- ✓ special chemical and hydrochloric acid resistant version available

The Turbiti O2 is the multipurpose ultrafine bubble generator suitable for agriculture, horticulture and fish cultivation sites. The Turbiti O2 must be combined with an oxygen generator, which creates 90% pure oxygen out of air.

Inside the turbiti O2 is Acniti's low pressure static mixer swirl flow technology, which creates billions of nano-sized bubbles by beating up the gas water mixture. The Turbiti O2 is flexible to implement, as it can be used with a wide array of pumps.


The turbiti O2 is used for aerating fishponds with nanobubbles. Super saturation of oxygen for water day storage tanks in horticulture. Drinking water solutions for chicken, cows, pigs and horses, giving high DO water with ultrafine bubbles to animals with enhance their food digestion more efficiently and results in healthier animals.

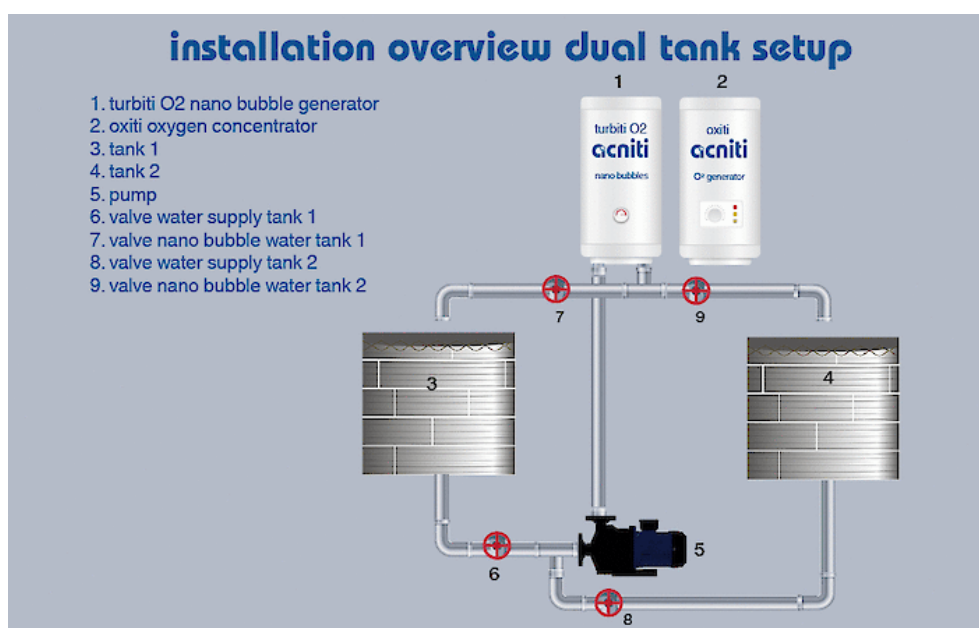

turbiti 727 o2 nanobubble mixer in wall mounted enclosure specs

Beschreibung		Metrisch	Kaiserlich
1	Model name	Turbiti 727 O2 in wall mounted enclosure	Turbiti 727 O2 in wall mounted enclosure
2	Model number	turbiti_727_wallmount_galvanized-box	turbiti_727_wallmount_galvanized-box
Flüssigkeit		Metrisch	Kaiserlich
3	Minimum flow / minute	75 Liter	20 Gallone
4	Maximum flow / minute	150 Liter	40 Gallone
5	Minimum flow / hour	4.5 M3	158.9 CF
6	Maximum flow / hour	9.0 M3	317.8 CF
7	water temperature minimum	-20 °C	-4 °F
8	water temperature maximum	50 °C	122 °F
9	Strainer availability and size	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.
10	Recommended inlet filter(s)	Medium pump inlet filter series	Medium pump inlet filter series
Umgebung		Metrisch	Kaiserlich
11	Ambient temperature minimum	-20 °C	-4 °F
12	Ambient temperature maximum	50 °C	122 °F
13	Relative humidity minimum	0 %	0 %
14	Relative humidity maximum	100 %	100 %
Gas		Metrisch	Kaiserlich


Gas		Metrisch	Kaiserlich
15	Minimum flow / minute	2.5 Liter	0.7 Gallone
16	Maximum flow / minute	5.0 Liter	1.3 Gallone
17	Minimum flow / hour	150 Liter	40 Gallone
18	Maximum flow / hour	300 Liter	79 Gallone
19	Druck Minimum	50 kPa	7 PSI
20	Druck maximal	350 kPa	51 PSI
21	Gas quality	No corrosive gasses: suitable for O2, air, CO2, N2	No corrosive gasses: suitable for O2, air, CO2, N2
22	Gas remark	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.
Elektrisch		Metrisch	Kaiserlich
23	Unit power consumption	No pump included with this product. Estimated power consumption 750-1000 watts.	No pump included with this product. Estimated power consumption 750-1000 watts.
24	Wetted parts	nylon based resins, PVC, EPDM rubber	nylon based resins, PVC, EPDM rubber
25	Pump model	Recommended: use of a low head centrifugal pump or pool pump	Recommended: use of a low head centrifugal pump or pool pump
26	Pump pressure setting	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).
27	Control	Manual by pressure gauche	Manual by pressure gauche
Pumpe			
28	@option	Ebara-Matrix-5-3	

Verbindungen		Metrisch	Kaiserlich
29	Water inlet	Rigid Rc 1" female coupling with thread	Rigid Rc 1" female coupling with thread
30	Water outlet	rigid Rc 3/4" female coupling with thread	rigid Rc 3/4" female coupling with thread
31	Gas inlet	10 mm standard quick fitting, 3/8 on request	10 mm standard quick fitting, 3/8 on request
Abmessungen & Gewicht		Metrisch	Kaiserlich
32	Abm. (B) x (T) x (H)	644 x 200 x 1040 mm	25.4 x 7.9 x 40.9 Zoll
33	weight	26.5 Kg	58.4 lbs.
34	Shipping dim. (w)x(d)x(h)	67 x 37 x 107 cm	26 x 15 x 42 Zoll
35	Shipping weight	35 Kg	77 lbs.
Bemerkungen			
36	Other remarks	 Easy to integrate with existing pool pumps	

turbiti 737 o2 nanobubble mixer in wall mounted enclosure specs

Beschreibung		Metrisch	Kaiserlich
1	Model name	Turbiti 737 O2 in wall mounted enclosure	Turbiti 737 O2 in wall mounted enclosure
2	Model number	turbiti_737_wallmount_galvanized-box	turbiti_737_wallmount_galvanized-box
Flüssigkeit		Metrisch	Kaiserlich
3	Minimum flow / minute	150 Liter	40 Gallone
4	Maximum flow / minute	400 Liter	106 Gallone
5	Minimum flow / hour	9.0 M3	317.8 CF
6	Maximum flow / hour	24 M3	848 CF
7	water temperature minimum	-20 °C	-4 °F
8	water temperature maximum	50 °C	122 °F
9	Strainer availability and size	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.
10	Recommended inlet filter(s)	Medium pump inlet filter series	Medium pump inlet filter series
Umgebung		Metrisch	Kaiserlich
11	Ambient temperature minimum	-20 °C	-4 °F
12	Ambient temperature maximum	50 °C	122 °F
13	Relative humidity minimum	0 %	0 %
14	Relative humidity maximum	100 %	100 %
Gas		Metrisch	Kaiserlich


Gas		Metrisch	Kaiserlich
15	Minimum flow / minute	5.0 Liter	1.3 Gallone
16	Maximum flow / minute	8.0 Liter	2.1 Gallone
17	Minimum flow / hour	300 Liter	79 Gallone
18	Maximum flow / hour	480 Liter	127 Gallone
19	Druck Minimum	50 kPa	7 PSI
20	Druck maximal	300 kPa	44 PSI
21	Gas quality	No corrosive gasses: suitable for O2, air, CO2, N2	No corrosive gasses: suitable for O2, air, CO2, N2
22	Gas remark	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.
Elektrisch		Metrisch	Kaiserlich
23	Unit power consumption	No pump included with this product. Estimated power consumption 750-1000 watts.	No pump included with this product. Estimated power consumption 750-1000 watts.
24	Wetted parts	nylon based resins, PVC, EPDM rubber	nylon based resins, PVC, EPDM rubber
25	Pump model	Recommended: use of a low head centrifugal pump or pool pump	Recommended: use of a low head centrifugal pump or pool pump
26	Pump pressure setting	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).
27	Control	Manual by pressure gauche	Manual by pressure gauche
Pumpe			
28	@option	Grundfos CM10-1	
29	@option	Ebara pump DWO-400	

Verbindungen		Metrisch	Kaiserlich
30	Water inlet	Rigid Rc 2" female coupling with thread	Rigid Rc 2" female coupling with thread
31	Water outlet	rigid Rc 1" female coupling with thread	rigid Rc 1" female coupling with thread
32	Gas inlet	10 mm standard quick fitting, 3/8 on request	10 mm standard quick fitting, 3/8 on request
Abmessungen & Gewicht		Metrisch	Kaiserlich
33	Abm. (B) x (T) x (H)	644 x 200 x 1040 mm	25.4 x 7.9 x 40.9 Zoll
34	weight	26.5 Kg	58.4 lbs.
35	Shipping dim. (w)x(d)x(h)	67 x 37 x 107 cm	26 x 15 x 42 Zoll
36	Shipping weight	35 Kg	77 lbs.
Bemerkungen			
37	Other remarks	 Easy to integrate with existing pool pumps	

turbiti 747 o2 nanobubble mixer in wall mounted enclosure specs

Beschreibung		Metrisch	Kaiserlich
1	Model name	Turbiti 747 O2 in wall mounted enclosure	Turbiti 747 O2 in wall mounted enclosure
2	Model number	turbiti_747_wallmount_galvanized-box	turbiti_747_wallmount_galvanized-box
Flüssigkeit		Metrisch	Kaiserlich
3	Minimum flow / minute	400 Liter	106 Gallone
4	Maximum flow / minute	600 Liter	159 Gallone
5	Minimum flow / hour	24 M3	848 CF
6	Maximum flow / hour	36 M3	1,271 CF
7	water temperature minimum	-20 °C	-4 °F
8	water temperature maximum	50 °C	122 °F
9	Strainer availability and size	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.
10	Recommended inlet filter(s)	Medium pump inlet filter series	Medium pump inlet filter series
Umgebung		Metrisch	Kaiserlich
11	Ambient temperature minimum	-20 °C	-4 °F
12	Ambient temperature maximum	50 °C	122 °F
13	Relative humidity minimum	0 %	0 %
14	Relative humidity maximum	100 %	100 %
Gas		Metrisch	Kaiserlich

Gas		Metrisch	Kaiserlich
15	Minimum flow / minute	5.0 Liter	1.3 Gallone
16	Maximum flow / minute	8.0 Liter	2.1 Gallone
17	Minimum flow / hour	300 Liter	79 Gallone
18	Maximum flow / hour	480 Liter	127 Gallone
19	Druck Minimum	50 kPa	7 PSI
20	Druck maximal	300 kPa	44 PSI
21	Gas quality	No corrosive gasses: suitable for O2, air, CO2, N2	No corrosive gasses: suitable for O2, air, CO2, N2
22	Gas remark	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.
Elektrisch		Metrisch	Kaiserlich
23	Unit power consumption	No pump included with this product. Estimated power consumption 1500-2000 watts.	No pump included with this product. Estimated power consumption 1500-2000 watts.
24	Wetted parts	nylon based resins, PVC, EPDM rubber	nylon based resins, PVC, EPDM rubber
25	Pump model	Recommended: use of a low head centrifugal pump or pool pump	Recommended: use of a low head centrifugal pump or pool pump
26	Pump pressure setting	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).
27	Control	Manual by pressure gauche	Manual by pressure gauche
Verbindungen		Metrisch	Kaiserlich
28	Water inlet	Rigid Rc 2" female coupling with thread	Rigid Rc 2" female coupling with thread

Verbindungen		Metrisch	Kaiserlich
29	Water outlet	rigid Rc 1.5" female coupling with thread	rigid Rc 1.5" female coupling with thread
30	Gas inlet	10 mm standard quick fitting, 3/8 on request	10 mm standard quick fitting, 3/8 on request
Abmessungen & Gewicht		Metrisch	Kaiserlich
31	Abm. (B) x (T) x (H)	644 x 200 x 1040 mm	25.4 x 7.9 x 40.9 Zoll
32	weight	26.5 Kg	58.4 lbs.
33	Shipping dim. (w)x(d)x(h)	67 x 37 x 107 cm	26 x 15 x 42 Zoll
34	Shipping weight	35 Kg	77 lbs.
Bemerkungen			
35	Other remarks	 Easy to integrate with existing pool pumps	