




acniti LLC
1-2-9 Nyoidani
Minoh Osaka
562-0011
Japan



industrial ozone nanobubble generator I microstar I acniti

High-efficiency industrial ozone nanobubble generator using hammer-rotation technology. Achieve maximum ozone dissolution with zero turbulence and low energy. Ideal for food safety, water treatment, and research.

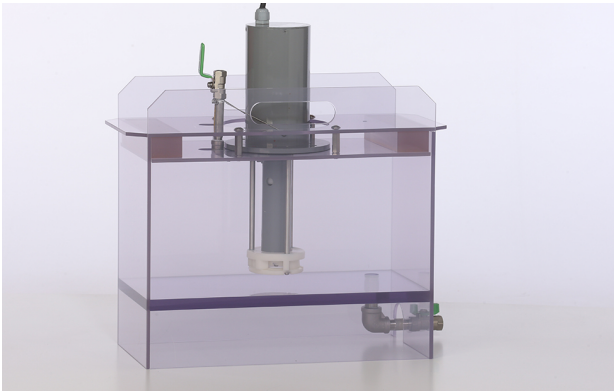

microStar research setup



industrial ozone nanobubble generator | microstar | acniti

microstar ozone nanobubble generator – lowest energy consumption for industrial water treatment

- ✓ Most energy efficient nanobubble generator in the market
- ✓ Strong in dissolving high concentrations of ozone
- ✓ Optimized for the creation of ozone nanobubbles
- ✓ Excellent research ultrafine bubble tool
- ✓ creating no turbulence in the water
- ✓ Proven track record in the oyster shell industry
- ✓ Suitable for removing external infections with norovirus, legionella, lysteria and salmonella in live animals.
- ✓ Motor life expectancy 80.000 hours
- ✓ Minimum rotation speed to generate nanobubbles 2000 RPM.

hammer-rotation

The patented **hammermill rotation technology** redefines nanobubble generation by eliminating the need for high-pressure pumps. A motor-driven shaft with precision-mounted hammers spins at **3,400 RPM** inside a vertical tube, crushing injected gas into ultra-fine nanobubbles through mechanical shearing—not hydraulic force.

no turbulence

Water and gas enter from the top, while hammers at the shaft bottom dissolve and fragment gas molecules into high-concentration nanobubbles with **zero turbulence**. Because the system doesn't circulate large volumes of water or require pressurization, it delivers the **lowest energy consumption per nanobubble** in the industry. Think of projects like washing eggs to remove bacteria or bacteria bed filters, which should not be disturbed but require adequate amounts of gas.

The microStar series leverages this hammermill design for **ozone gas applications** and harsh environments like **seawater treatment**, where corrosion resistance and energy efficiency are critical. Contact us for more details about this unique product. Currently, we have three sizes available. The smallest unit is ideally suited for research purposes; the two larger units can be used for production purposes.

models & specs

FS	30	2	AC	-	S	W	1	-	Sp
1	2	3	4		5	6	7		8

1. Nanobubble generator

indicationname

FS microStar

2. Motor nominal input

indicationmotor nominal input

30 30 Watt

40 400 Watt

15 150 Watt

75 750 Watt

3. Motor voltage

indicationmotor voltage

1 100V~110V (AC models only)

2 200V~220V (AC and DC models)

4. Motor Power

indicationpower type

AC AC-powered motor

DC DC powered motor, high-spec, higher nanobubble concentration.

5. microStar model

indicationnozzle

"S" short type

"L" long type (not available now)

6. Nanobubbles discharge

indication# directions

"W" 2 directions

"S" 1 direction

7. microStar Throughput and Bubble Discharge Size

indicationthroughput / maximum micro bubble discharge size (reference value)

"1" Standard / 1-30µm peak

"2" Medium / 20-60µm peak

"3" Large / mixing purpose only (no UFB generation) * special order model

8. microStar special specs, special sign for customized model

indicationspecifications

"Sp" special

microstar fs302ac-sw1 specs

Description		Metric	Imperial
1	Model name	microStar FS302AC-SW1	microStar FS302AC-SW1
2	Model number	FS302AC-SW1	FS302AC-SW1
Liquid		Metric	Imperial
3	Flow / minute	14 Liter	3.7 Gallon
4	Flow / hour	840 Liter	222 Gallon
5	water temperature minimum	0 °C	32 °F
6	water temperature maximum	40 °C	104 °F
7	Strainer availability and size		
Ambient		Metric	Imperial
8	Ambient temperature minimum	-20 °C	-4 °F
9	Ambient temperature maximum	40 °C	104 °F
Gas		Metric	Imperial
10	Minimum flow / minute	0.5 Liter	0.1 Gallon
11	Maximum flow / minute	1.0 Liter	0.3 Gallon
12	Minimum flow / hour	30 Liter	7.9 Gallon
13	Maximum flow / hour	60 Liter	16 Gallon
14	Pressure minimum	50 kPa	7 PSI
15	Pressure maximum	200 kPa	29 PSI
16	Gas quality	O2, O3, CO2, Air, N2	O2, O3, CO2, Air, N2
17	Gas remark		
Electrical		Metric	Imperial

Electrical		Metric	Imperial
18	Unit phase Ø voltage	3 Ø 200/220 or 3 Ø 100 / 115	3 Ø 200/220 or 3 Ø 100 / 115
19	Unit power consumption	30 watts	30 watts
20	Wetted parts		
21	Pump model		
22	Pump phase Ø voltage		
23	Pump phase Ø voltage 60Hz		
24	Pump pressure setting		
25	Control	Frequency Drive	Frequency Drive
Connections		Metric	Imperial
26	Water inlet		
27	Water outlet		
28	Gas inlet		
Dimensions & weight		Metric	Imperial
29	Dim. (w) x (d) x (h)	150 x 150 x 330 mm	5.9 x 5.9 x 13.0 inch
30	weight	3.5 Kg	7.7 lbs.
31	Shipping dim. (w)x(d)x(h)	58 x 43 x 29 cm	23 x 17 x 11 inch
32	Shipping weight	16.2 Kg	36 lbs.
Remarks			
33	Other remarks	✓ Acniti provides a presetup frequency drive and transformer to convert to the local electricity network. The units are a plug and plays. ✓ Seawater use possible ✓ Wetted parted PVC, Stainless Steel, POM	

microstar fs752dc-1 specs

Description		Metric	Imperial
1	Model name	microStar FS752DC-1	microStar FS752DC-1
2	Model number	FS752DC-__1	FS752DC-__1
Liquid		Metric	Imperial
3	Flow / minute	300 Liter	79 Gallon
4	Flow / hour	18,000 Liter	4,755.1 Gallon
5	water temperature minimum	0 °C	32 °F
6	water temperature maximum	40 °C	104 °F
7	Strainer availability and size		
Ambient		Metric	Imperial
8	Ambient temperature minimum	-20 °C	-4 °F
9	Ambient temperature maximum	40 °C	104 °F
Gas		Metric	Imperial
10	Minimum flow / minute	0.0 Liter	0.0 Gallon
11	Maximum flow / minute	30 Liter	7.9 Gallon
12	Minimum flow / hour	0.0 Liter	0.0 Gallon
13	Maximum flow / hour	1,800.0 Liter	476 Gallon
14	Gas quality	Air, O2, O3, N2, CO2	Air, O2, O3, N2, CO2
15	Gas remark		
Electrical		Metric	Imperial
16	Unit phase Ø voltage	Input: 3 Ø 200 VAC => Output: 3 Ø 200VDC	Input: 3 Ø 200 VAC => Output: 3 Ø 200VDC
17	Unit power consumption	750 watts	750 watts

Electrical		Metric	Imperial
18	Wetted parts	Ethylene propylene, FKM, Fluor, PVC, SUS316L, SUS316, POM	Ethylene propylene, FKM, Fluor, PVC, SUS316L, SUS316, POM
19	Pump model	Motor model: 4 poles SPM type brushless DC motor	Motor model: 4 poles SPM type brushless DC motor
20	Pump phase Ø voltage		
21	Pump phase Ø voltage 60Hz		
22	Pump pressure setting		
23	Control	Frequency Drive	Frequency Drive
Connections		Metric	Imperial
24	Water inlet	submerge to appropriate depth as per manual	submerge to appropriate depth as per manual
25	Water outlet		
26	Gas inlet	22mm	22mm
Dimensions & weight		Metric	Imperial
27	Dim. (w) x (d) x (h)	230 x 230 x 640 mm	9.1 x 9.1 x 25.2 inch
28	weight	18 Kg	39.7 lbs.
29	Shipping dim. (w)x(d)x(h)	40 x 40 x 80 cm	16 x 16 x 31 inch
30	Shipping weight	40 Kg	88 lbs.

Remarks

31 Other remarks

- ✓ the microStar comes with a specially programmed variable frequency drive, which must be used.
- ✓ The microstar 752 series generates effectively nanobubbles in a 10 meter diameter circle with a depth of 2 meter for short model (SS / SW).
- ✓ The micorStar 752 series are available with a 2-way (W) or 1-way water outlet (S).
- ✓ MicroStar is not suitable for underwater / submersible use.
- ✓ The microstar DC series requires a cooling fan on top of the motor, which needs a single phase 100 ~115 or 200~240 ac volt input. 10~15 Watt
- ✓ Regular maintenance: replace packing and oil seal
- ✓ Inverter drive frequency ~116,8 Hz
- ✓ Fine bubble concentration NanoBubbles (50~200nm) approx. 2.8x8, Microbubble 1~100 micron meter. Cumulative 50.000 or more

microstar fs752dc-ss3 specs

Description		Metric	Imperial
1	Model name	microStar FS752DC-SS3	microStar FS752DC-SS3
2	Model number	FS752DC-SS3	FS752DC-SS3
Liquid		Metric	Imperial
3	Flow / minute	400 Liter	106 Gallon
4	Flow / hour	24,000 Liter	6,340.1 Gallon
5	water temperature minimum	0 °C	32 °F
6	water temperature maximum	40 °C	104 °F
7	Strainer availability and size		
Ambient		Metric	Imperial
8	Ambient temperature minimum	-20 °C	-4 °F
9	Ambient temperature maximum	40 °C	104 °F
Gas		Metric	Imperial
10	Minimum flow / minute	0.0 Liter	0.0 Gallon
11	Maximum flow / minute	110 Liter	29 Gallon
12	Minimum flow / hour	0.0 Liter	0.0 Gallon
13	Maximum flow / hour	6,600.0 Liter	1,743.5 Gallon
14	Gas quality	Air, O2, (O3), N2, CO2	Air, O2, (O3), N2, CO2
15	Gas remark		
Electrical		Metric	Imperial
16	Unit phase Ø voltage	Input: 3 Ø 200 VAC => Output: 3 Ø 200VDC	Input: 3 Ø 200 VAC => Output: 3 Ø 200VDC

Electrical		Metric	Imperial
17	Unit power consumption	750 watts	750 watts
18	Wetted parts	Ethylene propylene, FKM, Fluor, PVC, SUS316L, SUS316, POM	Ethylene propylene, FKM, Fluor, PVC, SUS316L, SUS316, POM
19	Pump model	Motor model: 4 poles SPM type brushless DC motor	Motor model: 4 poles SPM type brushless DC motor
20	Pump phase Ø voltage		
21	Pump phase Ø voltage 60Hz		
22	Pump pressure setting		
23	Control	Frequency Drive	Frequency Drive
Connections		Metric	Imperial
24	Water inlet	submerge to appropriate depth as per manual	submerge to appropriate depth as per manual
25	Water outlet		
26	Gas inlet	22mm	22mm
Dimensions & weight		Metric	Imperial
27	Dim. (w) x (d) x (h)	230 x 230 x 640 mm	9.1 x 9.1 x 25.2 inch
28	weight	18 Kg	39.7 lbs.
29	Shipping dim. (w)x(d)x(h)	40 x 80 x 40 cm	16 x 31 x 16 inch
30	Shipping weight	20 Kg	44 lbs.

Remarks

31 Other remarks

- ✓ the microStar comes with a specially programmed variable frequency drive, which must be used.
- ✓ The microstar 752 series generates effectively nanobubbles in a 10 meter diameter circle with a depth of 2 meter for short model (SS / SW).
- ✓ The micorStar 752 series are available with a 2-way (W) or 1-way outlet (S).
- ✓ MicroStar is not suitable for underwater / submersible use.
- ✓ The microstar DC series requires a cooling fan on top of the motor, which needs a single phase 100 ~115 or 200~240 ac volt input. 10~15 Watt
- ✓ Regular maintenance: replace packing and oil seal
- ✓ Inverter drive frequency ~116,8 Hz
- ✓ Fine bubble concentration NanoBubbles (50~200nm) approx. 2.8x8, Microbubble 1~100 micron meter. Cumulative 50.000 or more